


HYDROCYCLONE SAND SEPARATOR

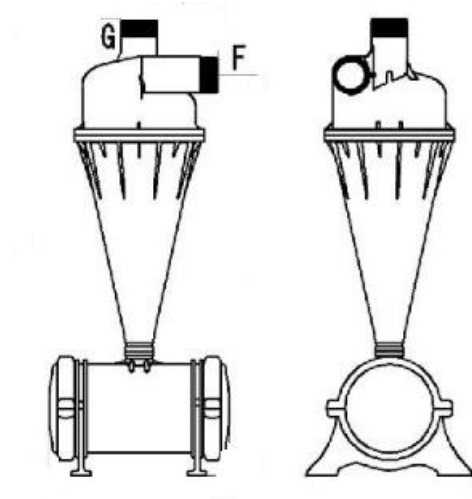

NO	SIZE	MAX FLOX (m3/h)	MAX PRESSURE (bar)	INLET / OUTLET		CAMERA VOLUME (l)
				F	G	
LX060F	2"	30	8	2 "BSP	2 "BSP	12
LX090F	3"	50	8	3 "BSP	3 "BSP	16
LX110F	4"	100	8	4 "BSP	4 "BSP	27

Sand centrifugal filter

Hydrocyclone system is sand & inorganic particle separator with centrifugal action.

Hydrocyclone is connected together with angled disc filter to make a complete system for fine filtering of water.

Centrifugal sand filter: 95~98% of sand and other particles can be separated from well water through high-speed water flow.

The centrifugal filter are designed to cover a filtration degree range of 45~150 micron, it can be used individually or combined with other filtration (or fertigation) systems.